


CMJ300 CMJ310(-W)



Unistrut® & Structural Ceiling Plates

FOR METAL U-CHANNEL STRUTS AND LOAD-BEARING FRAMEWORK

The Peerless-AV® CMJ300, CMJ310, and CMJ310-W Unistrut® & Structural Ceiling Plates provide versatile, heavy-duty mounting points for extension columns in demanding commercial AV installations. Each plate attaches directly to standard 1-5/8" x 1-5/8" Unistrut channel or to a solid structural ceiling surface, and features a 1-1/2"-11.5 NPT fitting for secure attachment of compatible EXT or AEC extension columns. The compact CMJ300 offers a 4" x 4" footprint for tighter installations, while the CMJ310 and CMJ310-W provide a larger 8" x 8" plate for broader structural support. All three models are constructed from 8-gauge cold rolled steel with a scratch-resistant fused epoxy finish. The CMJ300 and CMJ310 are finished in black; the CMJ310-W is finished in white to suit lighter ceiling environments.

Note: Unistrut fittings and attachment hardware are not included.

- Attaches directly to standard 1-5/8" x 1-5/8" Unistrut® channel or to a solid structural ceiling surface
- 1-1/2"-11.5 NPT fitting for secure attachment of compatible EXT or AEC extension columns
- The compact CMJ300 offers a 4" x 4" footprint for tighter installations, while the CMJ310(-W) provide a larger 8" x 8" plate for broader structural support
- 250lb (113kg) maximum load capacity
- 8-gauge cold rolled steel construction
- UL Listed for safety assurance
- Unistrut fittings and attachment hardware not included

This product is intended for use with UL Listed products and must be installed by a qualified professional installer



CMJ300 shown



Please visit peerless-av.com/en-us/patents for patent information.

Model Numbers

WARRANTY: Limited 5-year

CMJ300	4" x 4" Unistrut® & Structural Ceiling Plate for Metal U-Channel Struts and Load-Bearing Framework
CMJ310(-W)	8" x 8" Unistrut® & Structural Ceiling Plate for Metal U-Channel Struts and Load-Bearing Framework

Product Specifications



	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
CMJ300	4.00" x 4.00" x 0.66" (102 x 102 x 17mm)	0.64lb (0.29kg)	250lb (113kg)	Scratch-Resistant Fused Epoxy	CMJ300, CMJ310: Black CMJ310-W: White
CMJ310(-W)	8.00" x 8.00" x 0.66" (203 x 203 x 17mm)	2.92lb (1.32kg)			

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
CMJ300	9.50" x 1.13" x 10.38" (241 x 29 x 264mm)	2.0lb (0.91kg)	CMJ300: 735025205405 CMJ310: 735029205418	Ceiling Plate, Mounting Hardware, Installation Instructions	1
CMJ310(-W)	9.50" x 1.00" x 10.25" (241 x 25 x 260mm)	3.1lb (1.4kg)	CMJ310-W: 735029363392		

Compatible with: **AEC models:** Adjustable Extension AEC 1-1/2"-11.5 NPT Columns
EXT models: Fixed Length Extension AEC 1-1/2"-11.5 NPT Columns

All dimensions = inch (mm)

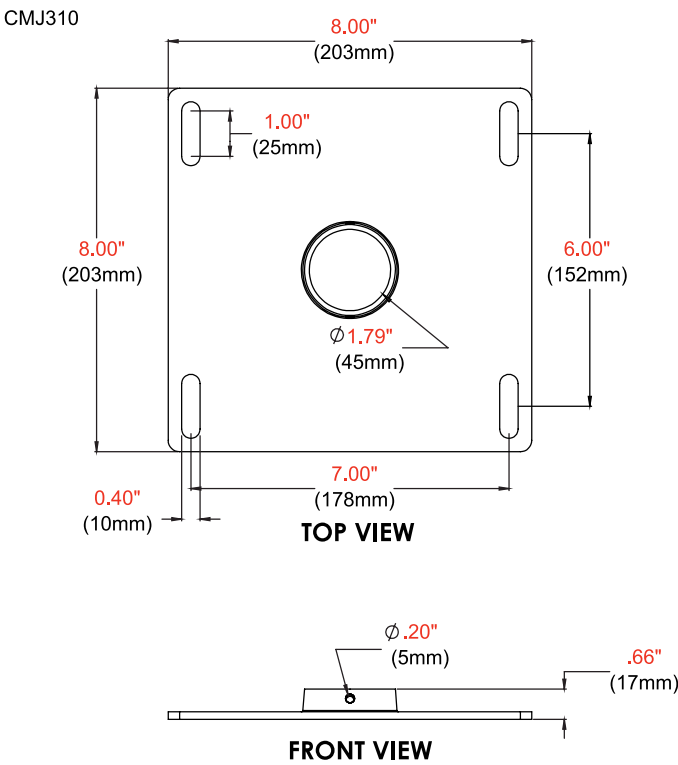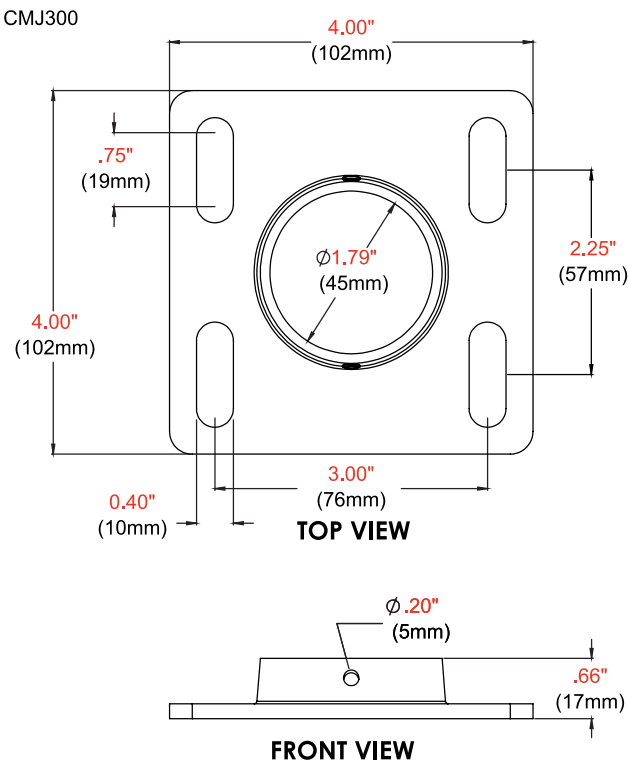

Architect Specifications

The Unistrut® & Structural Ceiling Plate for Metal U-Channel Struts and Load-Bearing Framework shall be a Peerless-AV model CMJ300, CMJ310, or CMJ310-W and shall be located where indicated on the plans. It shall be constructed of 8-gauge cold rolled steel. The ceiling plate shall be UL Listed. The finish shall be scratch-resistant Black Fused Epoxy (CMJ300 and CMJ310) or White Fused Epoxy (CMJ310-W). Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502
USA
(800) 865-2112
(630) 375-5100

Peerless-AV EMEA
Unit 2 Curo Park
Frogmore, St. Albans
Hertfordshire, AL2 2DD
United Kingdom
+44 (0) 1923 200 100

Peerless-AV B.V.
Papendorpseweg 75
3528 BJ Utrecht
The Netherlands
+31 (0) 70 770 8037

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300

